

# Drought experiments in alley-cropping systems. From concepts to field reality: lessons learnt at the Restinclières Farm Estate, France




BLANCHET, G.<sup>1</sup> GOSME, M.<sup>1</sup> BOURDONCLE, J-F.<sup>1</sup> SELLIER, A.<sup>1</sup> DUFOUR, L.<sup>1</sup> VINCENT, G.<sup>2</sup> DUPRAZ, C.<sup>1</sup>

<sup>1</sup> INRA, UMR SYSTEM, Montpellier, FRANCE <sup>2</sup> IRD, UMR AMAP, Montpellier, FRANCE. Contact : [guillaume.blanchet@inra.fr](mailto:guillaume.blanchet@inra.fr)

## Introduction

In the context of climate change, the Mediterranean region will be more frequently prone to climate hazards, such as drought and heat waves. Given this context, the sustainability of agroecosystems in those regions is at stake.

In mature alley cropping systems (ACS), understory conditions might buffer adverse conditions encountered by intercrops during drought events. However, it is still undecided whether facilitation processes will prevail or not on competition interactions.

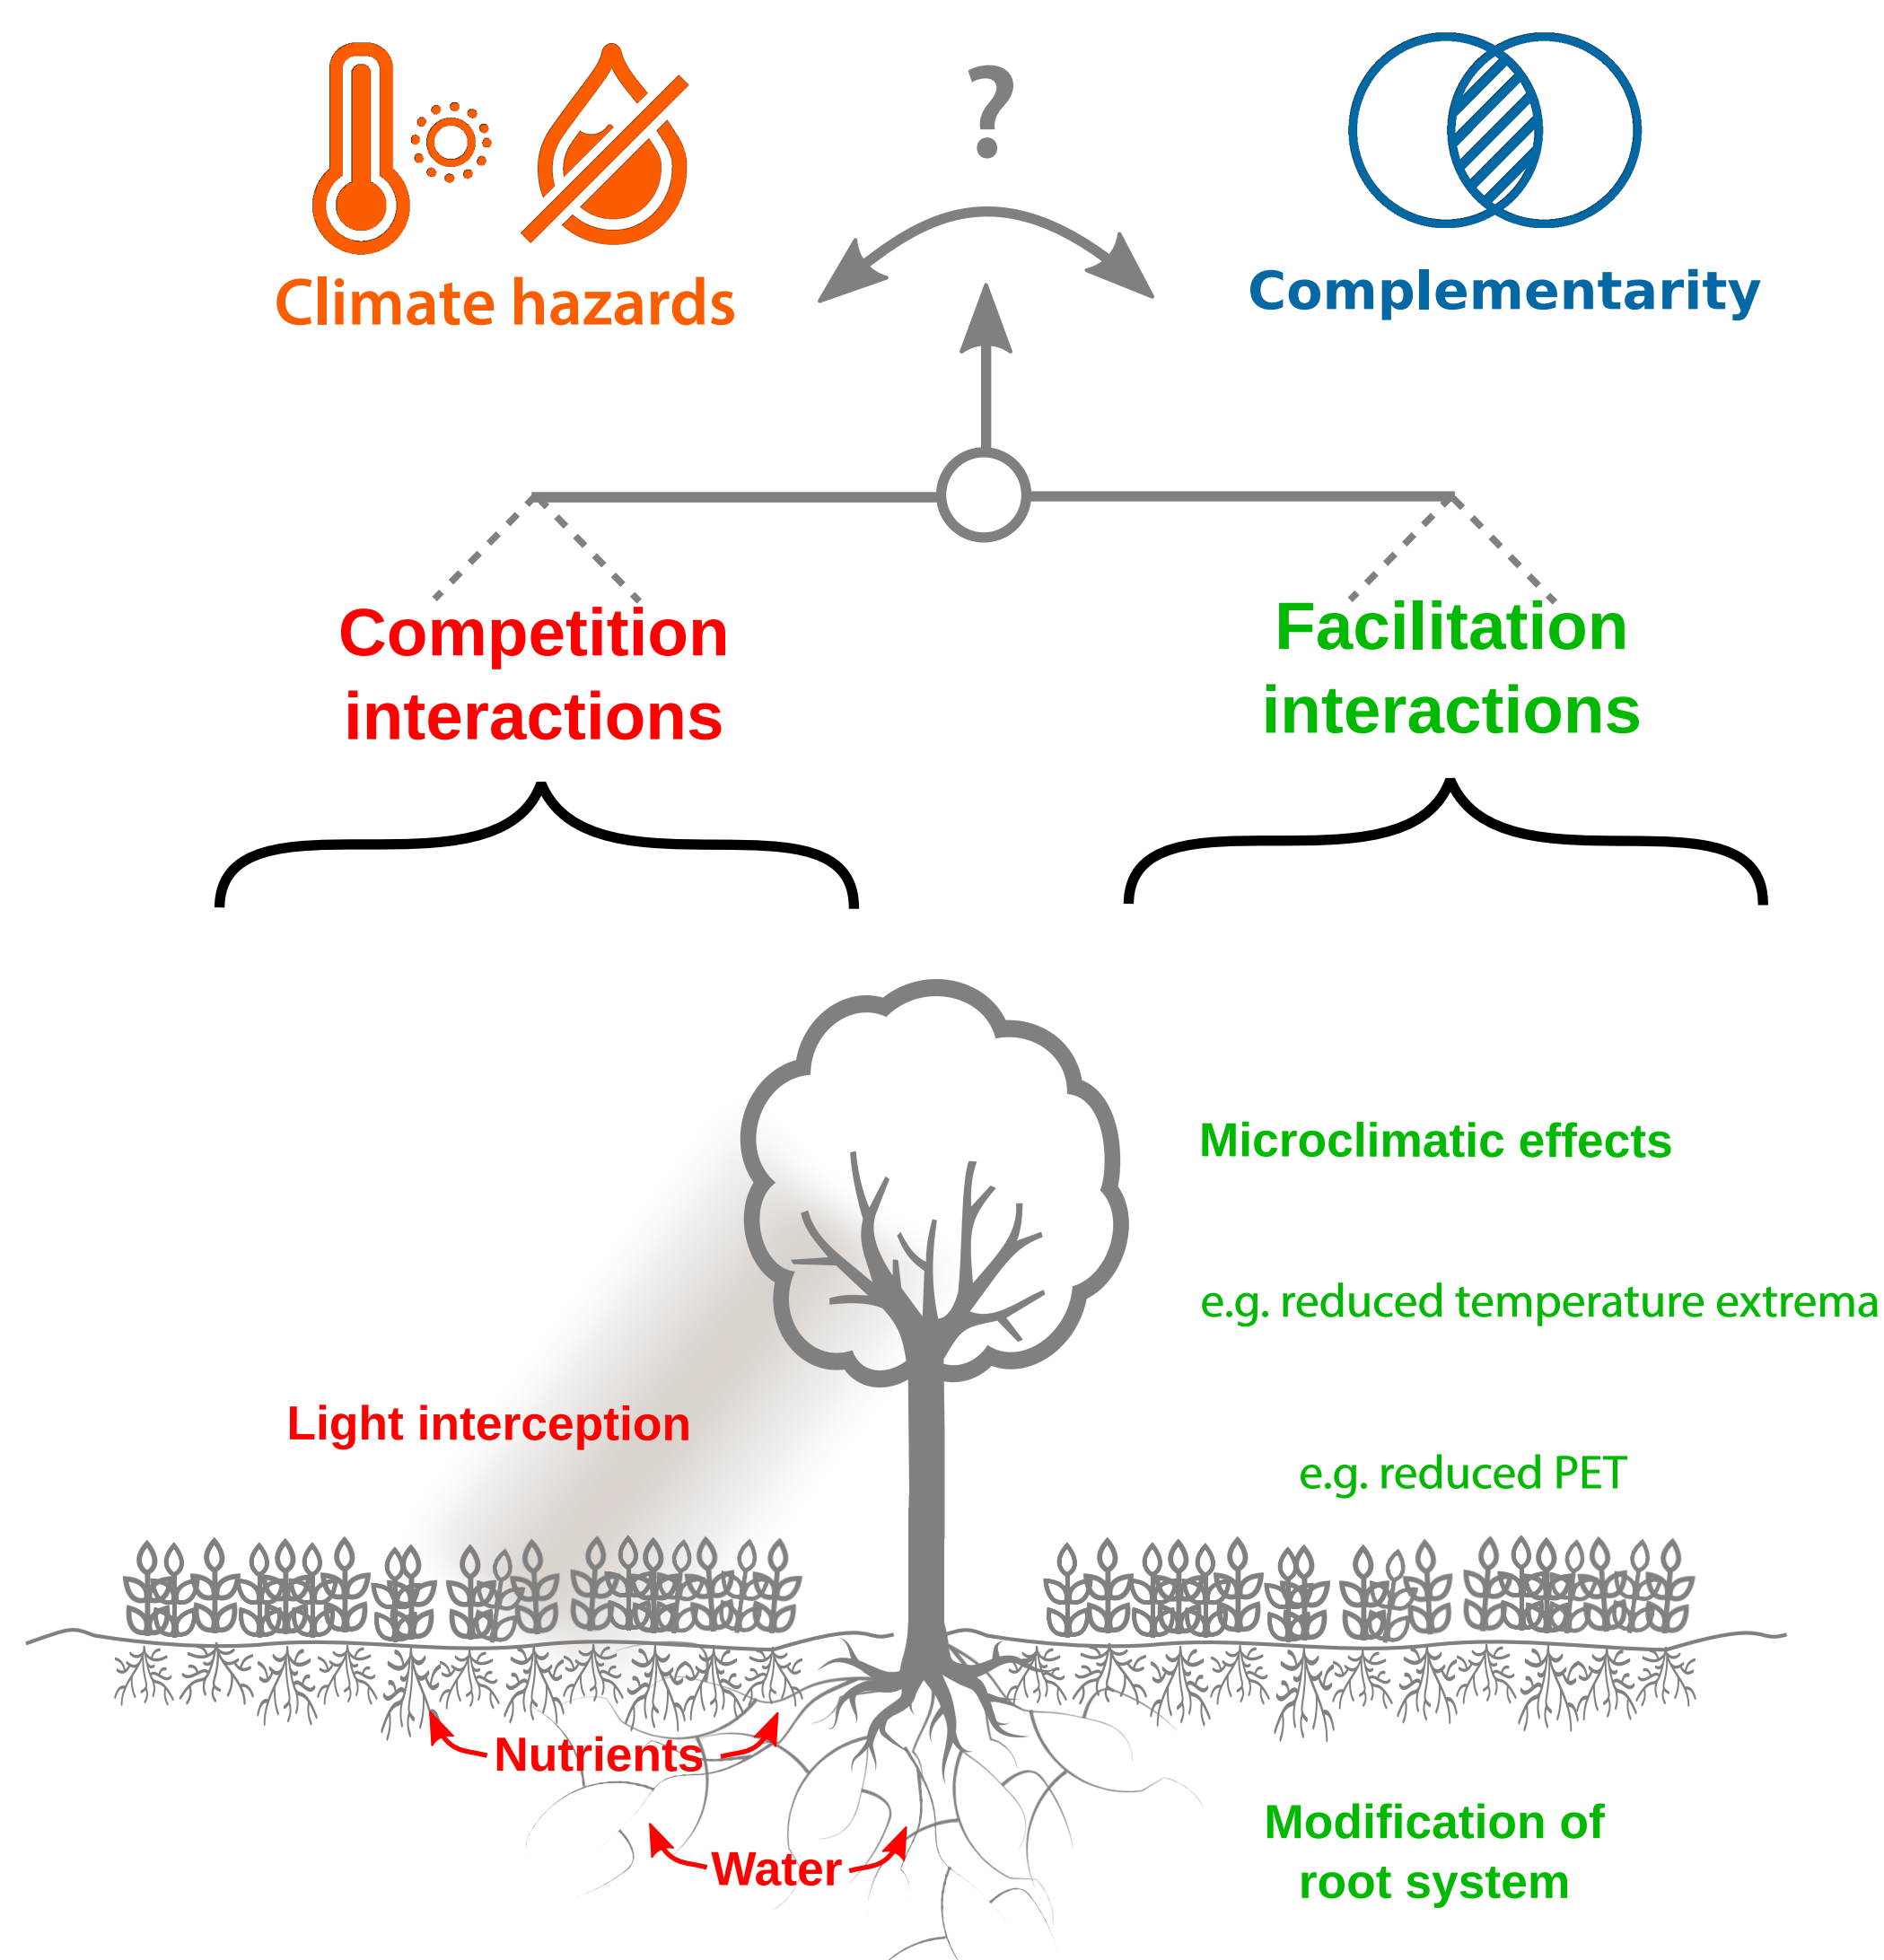

To tackle this problematic, we proposed a dual experiment :  
 - on the field, drought experiment is carried out by means of rainout shelters  
 - field data are used for modelling purposes in order to obtain deeper understanding of ecological processes at play

## Objectives of the study


- To perform total rain exclusion in both monocropping and (mature) alley-cropping systems
- To monitor and assess the impacts of (artificial) drought on annual crops in both agroecosystems. An emphasis is given on :
  - Soil water availability
  - Atmospheric evaporation demand
  - Crop water stress (instantaneous and integrated)
  - Growth dynamics and crop yields

## Experimental site

Domaine de Restinclières, south of France

24 year-old hybrid walnut

3 year-rotation based on winter crops (2018-2019 : Winter Pea)

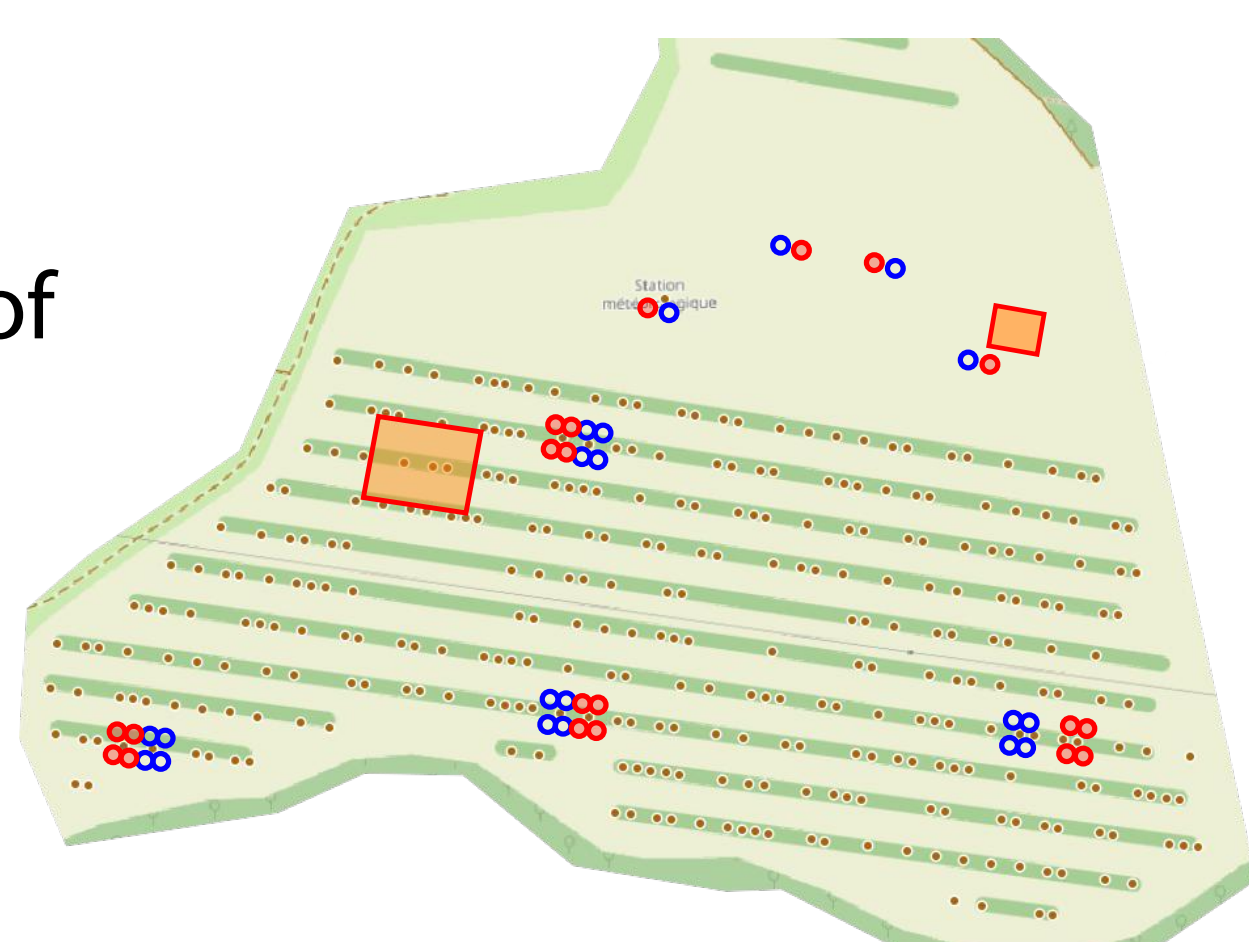

## Feedbacks from the field

Performing drought experiment in ACS appears to be challenging in terms of implementation and logistics. In particular, a critical aspect concerns the ideal size of rainout shelters, which appears to be a matter of compromise between scientific, technical, organisational and financial aspects. 2 low-cost designs were experimented and compared.

### 1<sup>st</sup> design



Cable structure with folding tarpaulins. Covers 2 alleys (over ~800 m<sup>2</sup>).

### 2<sup>nd</sup> design



Tubular structure with removable roof. 4 rainout shelters around a tree (~4x15m<sup>2</sup>).

### Typology of rainout shelters

#### Scientific aspects

##### Experimental design

Single block design

Paired design

##### Artefacts

Lower risk of split-root artefact  
Modified tree growth in presence of cables ?

High risk of split-root artefact

##### Edge effects

Significant in the central part of the alley / Irregular according to wind conditions

Regular : about 0.5 m along the edge of the shelter

#### Technical aspects

Issues in case of strong wind gust and heavy rain events. Important failure risk with consequences on the whole experiment

More stable in case of strong wind gust. Low risk of water evacuation issues. Reduced experimental risk (shared among the 20 rainout shelters)


#### Organisational aspects

Installation time : ~3h for 2 tents  
Regular surveillance when set up  
Moderate maintenance

Installation time : ~2h for 20 shelters  
Relative autonomy when set up  
Low maintenance

## Preliminary results

- Previous growing season (2017-2018) pushed to its very limits the 1st design of rainout shelter, leading to the development of the 2nd design.
- Experiment is currently on-going (2018-2019) and successful so far (115 mm intercepted). The use of both rainout shelters led to contrasted soil water availability up to 50 cm depth as revealed by TDR sensors.

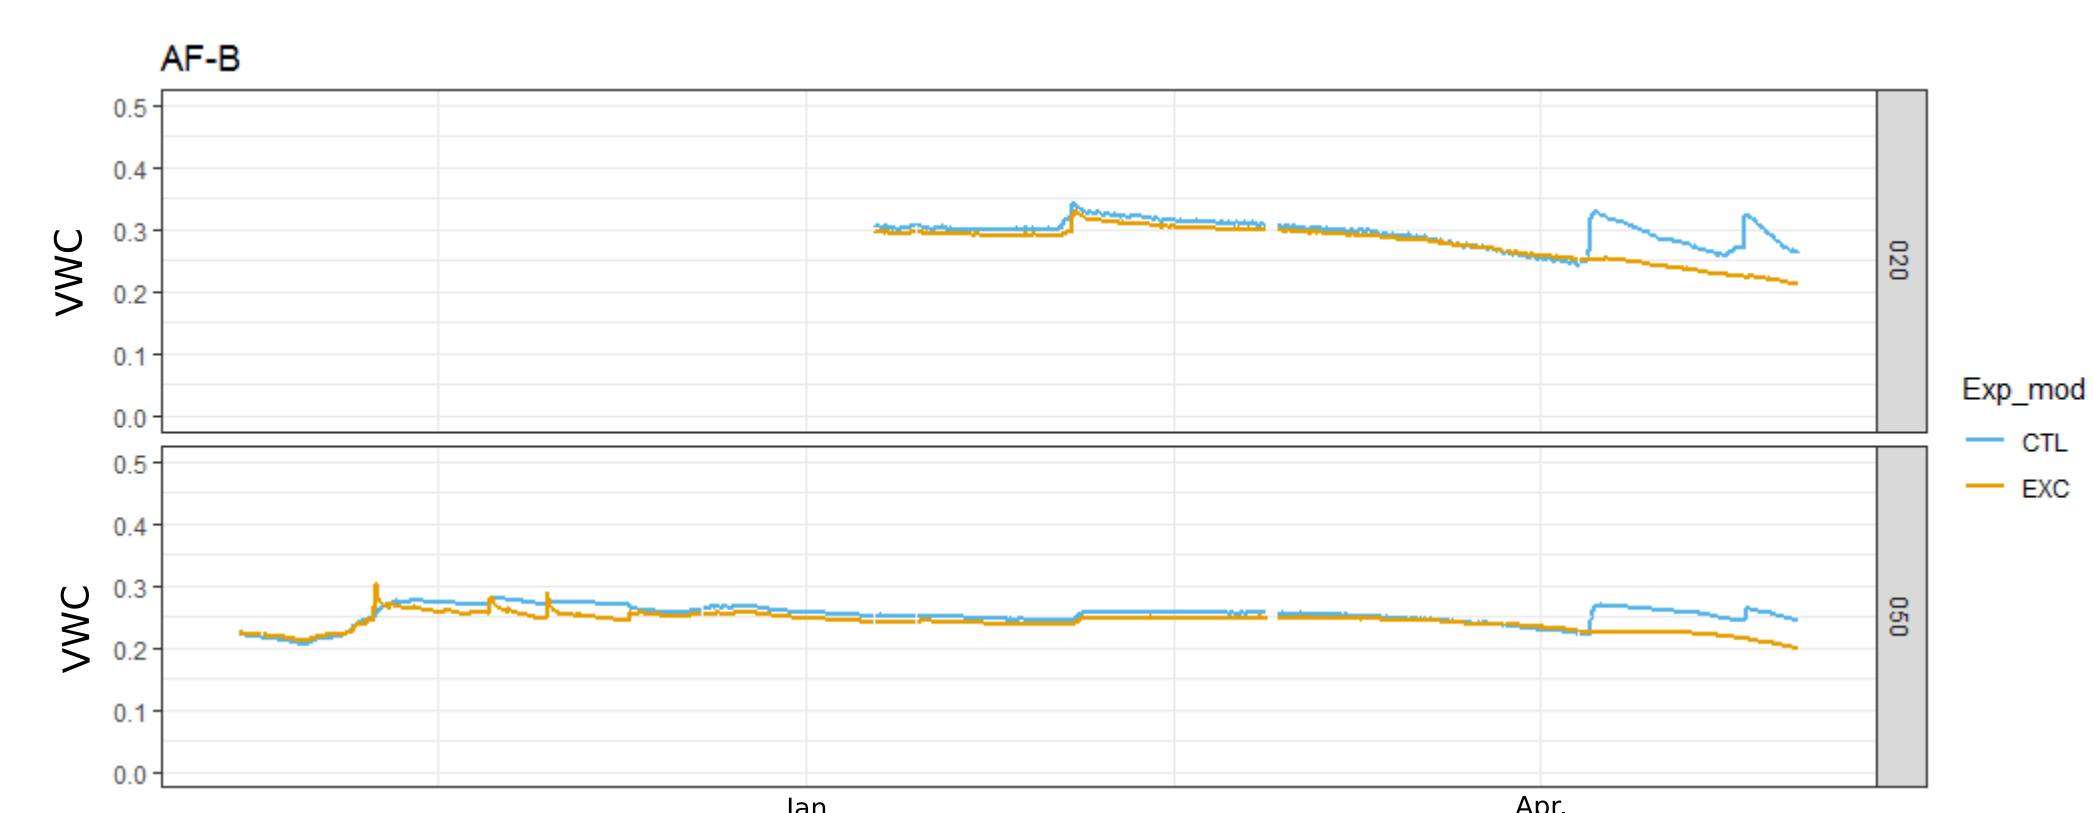

Visible effects regarding crop biomass, phenology and physiology are already observed.

## Perspectives

- Evaluation of the ability of the Hi-sAFe agroforestry model (Dupraz et al., 2019 - see posters L24.P.06 and L24.P.17) to simulate crop growth dynamics and yield under drought in ACS.